

# CCTV Camera

## VS-DE30-70



Effio-E + 673CCD  
OSD Button in the cable




### Features

- ◆ Vandalproof IR Dome Camera
- ◆ SONY Exview HAD CCD II (ICX672/3AKA)
- ◆ 36 pcs  $\varnothing$  5mm IR-LED, IR Range 30M
- ◆ OSD/2D-DNR/BLC/MD/Privacy Masking
- ◆ 3-Axis Design, easy for installation
- ◆ Built-in 6mm CS Lens



### Size Chart

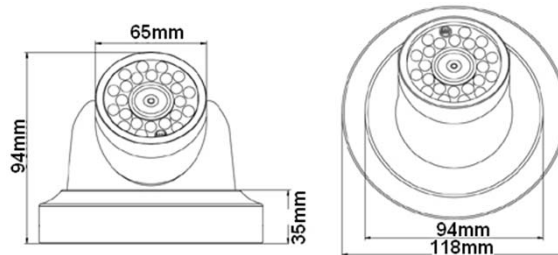

### Specifications

| Model Name              | VS-DE30-70                                        |
|-------------------------|---------------------------------------------------|
| Image Device            | 1/3" Exview HAD CCD II (ICX672/3AKA)              |
| DSP Device              | Effio-E (CXD4127GG,CXD4816GG)                     |
| Resolution              | Color Mode: 650TVL; B/W Mode:700TVL               |
| Picture Elements        | PAL:976(H)×582(V) NTSC:976(H)×494(V)              |
| IR Led & IR Range       | 36pcs $\varnothing$ 5 IR Led; 30M IR Distance     |
| Min. Illumination       | 0.001 Lux (F2.0)/ 0 Lux IR On                     |
| Lens Furnished          | Built-In 6mm CS Lens (4mm,8mm CS Lens Optional)   |
| TV System               | PAL/NTSC                                          |
| Electronic Shutter      | NTSC:1/60~1/100,000, PAL:1/50~1/110,000           |
| S/N Ratio               | More than 52dB                                    |
| Gamma                   | 0.45                                              |
| Exposure                | Auto                                              |
| Shuter/ AGC             | Auto/Manual                                       |
| White Balance           | ATW / User1/User2                                 |
| Backlight               | OFF/ON/BLC/ HLC                                   |
| Pict Adjust             | Mirror/Brightness/Contrast/Sharpness/Hue/Gain     |
| ATR                     | ON/OFF                                            |
| Motion Det              | OFF/ON(Detect sense/ Area Sel)                    |
| Peivacy Masking         | OFF/ON (4 Zone)                                   |
| Day/Nigh                | True Day and Night (Auto/ Day / Night / Ext. D&N) |
| 2D-NR                   | OFF/ON (Y/C level)                                |
| Camera ID               | OFF/ON                                            |
| Sync. System            | Internal                                          |
| Waterproofing Criterion | IP 66                                             |
| Video Output            | 1 Vp-p / 75 Ohms                                  |
| Power Supply            | DC12V±10%                                         |
| Operation Temperature   | -10℃ ~ +50℃ RH95% Max                             |
| Dimension               | $\varnothing$ 118x94mm                            |
| Weight                  | 900g                                              |

Design and specifications are subject to change without notice.