

# CCTV Camera

## VS-VI30 Series




### Features

- ◆ Weatherproof IR Camera
- ◆ SONY / SHARP Color CCD
- ◆ 36 pcs  $\phi$  5mm IR-LED, IR Range 30M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 4--9mm Manual Zoom Lens



### Size Chart

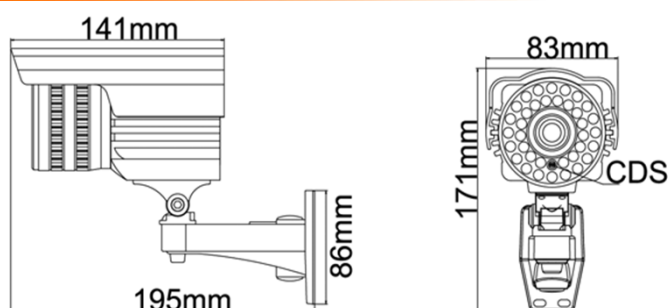

### Specifications

| Model Name              | VS-VI30-38                                                    | VS-VI30-36                               | VS-VI30-32                            | VS-VI30-82 |
|-------------------------|---------------------------------------------------------------|------------------------------------------|---------------------------------------|------------|
| Image Device            | 1/3 SONY                                                      | 1/3 SHARP                                | 1/3 SONY                              | 1/4 SHARP  |
| Resolution              | 540 TVL                                                       | 500 TVL                                  | 420 TVL                               | 420 TVL    |
| Picture Elements        | PAL:795(H)×596(V)<br>NTSC:811(H)×508(V)                       | PAL:752(H)×582(V);<br>NTSC:768(H)×494(V) | PAL:500(H)×582(V); NTSC:510(H)×492(V) |            |
| Min. Illumination       | 0.2 Lux /F2.0                                                 | 0.8 Lux /F2.0                            | 1.0 Lux /F2.0                         |            |
| TV System               | PAL/NTSC                                                      |                                          |                                       |            |
| Lens Furnished          | 4--9mm Manual Zoom Lens (Optional 2.8--12mm Manual Zoom Lens) |                                          |                                       |            |
| Infrared Luminary       | 36 pieces $\varnothing$ 5 m m IR-LED                          |                                          |                                       |            |
| Illuminate Distance     | 30 M                                                          |                                          |                                       |            |
| Wavelength              | 850 nm                                                        |                                          |                                       |            |
| Waterproofing Criterion | IP 66                                                         |                                          |                                       |            |
| S/N Ratio               | More than 48dB                                                |                                          |                                       |            |
| Electronic Shutter      | NTSC:1/60~1/100,000, PAL:1/50~1/110,000                       |                                          |                                       |            |
| Gamma                   | 0.45                                                          |                                          |                                       |            |
| White Balance           | Auto                                                          |                                          |                                       |            |
| Gain Control            | Auto                                                          |                                          |                                       |            |
| Sync. System            | Internal                                                      |                                          |                                       |            |
| Video Output            | 1 Vp-p / 75 Ohms                                              |                                          |                                       |            |
| Power Supply            | DC12V±10%                                                     |                                          |                                       |            |
| Operation Temperature   | -10℃ ~ +50℃ RH95% Max                                         |                                          |                                       |            |
| Dimension               | 195 x 171 x 83 mm                                             |                                          |                                       |            |
| Weight                  | 1400g                                                         |                                          |                                       |            |

*Design and specifications are subject to change without notice.*