

CCTV Camera

VS-CI30 Series




Features

- ◆ Weatherproof IR Camera
- ◆ SONY / SHARP Color CCD
- ◆ 30 pcs $\varnothing$ 5mm IR-LED, IR Range 25M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 6 mm Board Lens



Size Chart

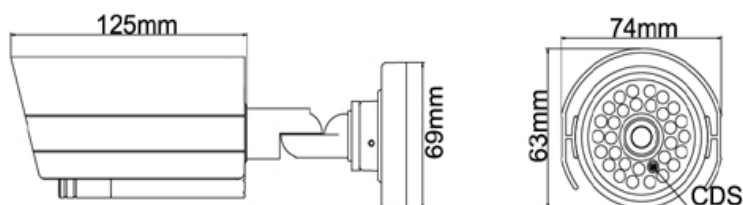

Specifications

Model Name	VS-CI30-38	VS-CI30-32	VS-CI30-82
Image Device	1/3 SONY	1/3 SONY	1/4 SHARP
Resolution	540 TVL	420 TVL	420 TVL
Picture Elements	PAL:795(H)×596(V) NTSC:811(H)×508(V)	PAL:500(H)×582(V); NTSC:510(H)×492(V)	
Min. Illumination	0.2 Lux /F2.0	0.8 Lux /F2.0	1.0 Lux /F2.0
TV System	PAL/NTSC		
Lens Furnished	6 mm Board Lens (Optional 3.6 mm or 4 mm Lens)		
Infrared Luminary	30 pieces $\varnothing$ 5 mm IR-LED		
Illuminate Distance	25 M		
Wavelength	850 nm		
Waterproofing Criterion	IP 66		
S/N Ratio	More than 48dB		
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000		
Gamma	0.45		
White Balance	Auto		
Gain Control	Auto		
Sync. System	Internal		
Video Output	1 Vp-p / 75 Ohms		
Power Supply	DC12V±10%		
Operation Temperature	-10℃ ~ +50℃ RH95% Max		
Dimension	125 x 63 x 74 mm		
Weight	650g		

Design and specifications are subject to change without notice.