

CCTV Camera

VS-IE30 Series




Features

- ◆ Weatherproof IR Camera
- ◆ SONY / SHARP Color CCD
- ◆ 30 pcs $\varnothing$ 5mm IR-LED, IR Range 25M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 3.6mm Board Lens



Size Chart

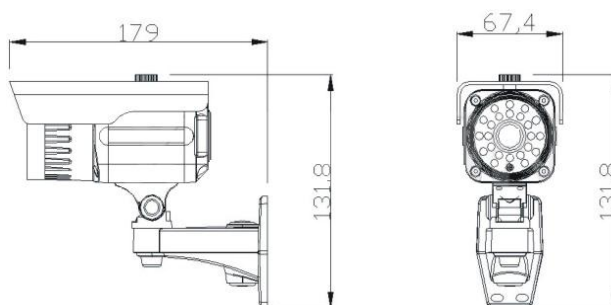

Specifications

Model Name	VS-IE30-65H	VS-IE30-32
Image Device	1/3 SHARP	1/3 SONY
Resolution	600 TVL (Sharp 2365 + Sharp 36B15)	420 TVL
Picture Elements	PAL:795(H)×596(V); NTSC:811(H)×508(V)	PAL:500(H)×582(V); NTSC:510(H)×492(V)
Min. Illumination	0.2 Lux /F2.0	0.8 Lux /F2.0
TV System	PAL/NTSC	
Lens Furnished	Built-in 3.6mm Board Lens(6mm is Optional)	
Infrared Luminary	30 pieces $\varnothing$ 5 mm IR-LED	
Illuminate Distance	25 M	
Wavelength	850 nm	
Waterproofing Criterion	IP 66	
S/N Ratio	More than 48dB	
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000	
Gamma	0.45	
White Balance	Auto	
Gain Control	Auto	
Sync. System	Internal	
Video Output	1 Vp-p / 75 Ohms	
Power Supply	DC12V±10%	
Operation Temperature	-10℃ ~ +50℃ RH95% Max	
Dimension	179(L)×67.4(W)×131.8(H) mm	
Weight	900g	

Design and specifications are subject to change without notice.