

# CCTV Camera

## VS-VI30T Series




**SONY 700TVL Solution**  
**Effio-E + 673 CCD With OSD**

### Features

- ◆ Weatherproof IR Camera
- ◆ SONY / SHARP Color CCD
- ◆ 42 pcs  $\varnothing$  5mm IR-LED, IR Range 35M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 4--9mm Manual Zoom Lens



### Size Chart

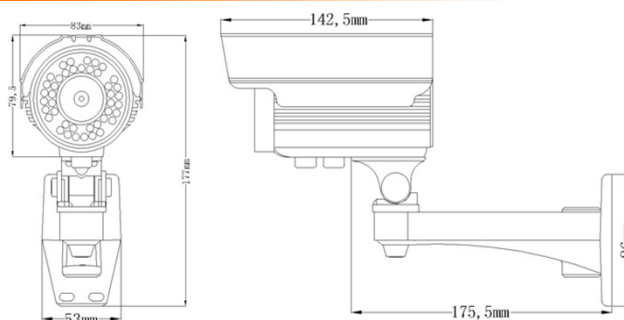

### Specifications

| Model Name              | VS-VI30T-70                                                   | VS-VI30T-38                             | VS-VI30T-36                              | VS-VI30T-32                              |
|-------------------------|---------------------------------------------------------------|-----------------------------------------|------------------------------------------|------------------------------------------|
| Image Device            | 1/3 SONY                                                      | 1/3 SONY                                | 1/3 SHARP                                | 1/3 SONY                                 |
| Resolution              | 700 TVL ( <b>Effio-E</b> )                                    | 540 TVL                                 | 500 TVL                                  | 420 TVL                                  |
| Picture Elements        | PAL:976(H)×494(V)<br>NTSC:976(H)×582(V)                       | PAL:795(H)×596(V)<br>NTSC:811(H)×508(V) | PAL:752(H)×582(V);<br>NTSC:768(H)×494(V) | PAL:500(H)×582(V);<br>NTSC:510(H)×492(V) |
| Min. Illumination       | 0.01 Lux /F2.0                                                | 0.2 Lux /F2.0                           | 0.8 Lux /F2.0                            | 1.0 Lux /F2.0                            |
| TV System               | PAL/NTSC                                                      |                                         |                                          |                                          |
| Lens Furnished          | 4--9mm Manual Zoom Lens (Optional 2.8--12mm Manual Zoom Lens) |                                         |                                          |                                          |
| Infrared Luminary       | 42 pieces $\varnothing$ 5 mm IR-LED                           |                                         |                                          |                                          |
| Illuminate Distance     | 35 M                                                          |                                         |                                          |                                          |
| Wavelength              | 850 nm                                                        |                                         |                                          |                                          |
| Waterproofing Criterion | IP 66                                                         |                                         |                                          |                                          |
| S/N Ratio               | More than 48dB                                                |                                         |                                          |                                          |
| Electronic Shutter      | NTSC:1/60~1/100,000, PAL:1/50~1/110,000                       |                                         |                                          |                                          |
| Gamma                   | 0.45                                                          |                                         |                                          |                                          |
| White Balance           | Auto                                                          |                                         |                                          |                                          |
| Gain Control            | Auto                                                          |                                         |                                          |                                          |
| Sync. System            | Internal                                                      |                                         |                                          |                                          |
| Video Output            | 1 Vp-p / 75 Ohms                                              |                                         |                                          |                                          |
| Power Supply            | DC12V±10%                                                     |                                         |                                          |                                          |
| Operation Temperature   | -10℃ ~ +50℃ RH95% Max                                         |                                         |                                          |                                          |
| Dimension               | 142 x 82 x 79.5 mm                                            |                                         |                                          |                                          |
| Weight                  | 1400g                                                         |                                         |                                          |                                          |

*Design and specifications are subject to change without notice.*