

CCTV Camera

VS-VI50T Series




SONY 700TVL Solution
Effio-E + 673 CCD With OSD

Features

- ◆ Weatherproof IR Camera
- ◆ SONY / SHARP Color CCD
- ◆ 72 pcs $\varnothing$ 5mm IR-LED, IR Range 50M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 4--9mm Manual Zoom Lens



Size Chart

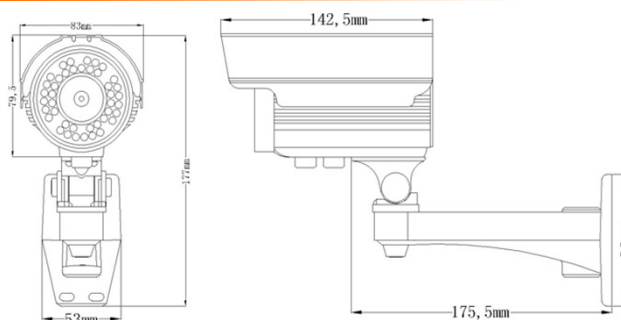

Specifications

Model Name	VS-VI50T-70	VS-VI50T-38	VS-VI50T-36	VS-VI50T-32
Image Device	1/3 SONY	1/3 SONY	1/3 SHARP	1/3 SONY
Resolution	700 TVL (Effio-E)	540 TVL	500 TVL	420 TVL
Picture Elements	PAL:976(H)×494(V) NTSC:976(H)×582(V)	PAL:795(H)×596(V) NTSC:811(H)×508(V)	PAL:752(H)×582(V); NTSC:768(H)×494(V)	PAL:500(H)×582(V); NTSC:510(H)×492(V)
Min. Illumination	0.01 Lux /F2.0	0.2 Lux /F2.0	0.8 Lux /F2.0	1.0 Lux /F2.0
TV System	PAL/NTSC			
Lens Furnished	4--9mm Manual Zoom Lens (Optional 2.8--12mm Manual Zoom Lens)			
Infrared Luminary	72 pieces $\varnothing$ 5 mm IR-LED			
Illuminate Distance	50 M			
Wavelength	850 nm			
Waterproofing Criterion	IP 66			
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000			
Gamma	0.45			
White Balance	Auto			
Gain Control	Auto			
Sync. System	Internal			
Video Output	1 Vp-p / 75 Ohms			
Power Supply	DC12V±10%			
Operation Temperature	-10℃ ~ +50℃ RH95% Max			
Dimension	142 x 82 x 79.5 mm			
Weight	1600g			

Design and specifications are subject to change without notice.