

CCTV Camera

VS-CI30V-60



OSD Button in the cable




Features

- ◆ Weatherproof IR Camera
- ◆ SONY Super HAD II Color CCD
- ◆ 36 pcs $\varnothing$ 5mm IR-LED, IR Range 30M
- ◆ OSD 3D-DNR,D-WDR,BLC
- ◆ 3-Axis Bracket,Hidden Cable Design
- ◆ Built-in 4--9mm Manual Zoom Lens



Size Chart

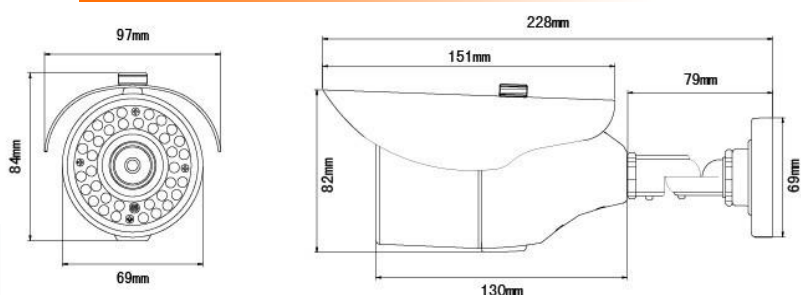

Specifications

Model Name	VS-CI30V-60
Image Device	1/3" Super HAD II CCD (ICX 638/639BK)
DSP Device	Nextchip 2040
Resolution	600TVL
Picture Elements	PAL:795(H)×596(V) NTSC:811(H)×508(V)
IR Led & IR Range	36pcs $\varnothing$ 5 IR Led; 30M IR Distance
Min. Illumination	0.001 Lux (F2.0)/ 0 Lux IR On
Lens Furnished	Built-in 4--9mm Manual Zoom Lens (2.8--12mm Optional)
TV System	PAL/NTSC
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
S/N Ratio	More than 52dB
Gamma	0.45
Exposure	Auto
Exposure	Auto
Shuter/ AGC	Auto/Manual
White Balance	ATW / AWB / INDOOR / OUTDOOR / MANUAL / AWC
Backlight	OFF/ON/BLC/ HLC
Sharpness	0~31 (Level Selectable)
Motion Det	OFF/ON(4 Zone Selectable)
Peivacy Masking	OFF/ON (8 Zone)
Day/Nigh	Color / Auto / B/W
3DNR	OFF/ON (1~100 Level Selectable)
D-WDR	INDOOR / OUTDOOR / OFF
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms

Power Supply	DC12V±10%
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Dimension	228(L)x97(W)x84(H) mm
Weight	1000g

Design and specifications are subject to change without notice.