

CCTV Camera

VS-DI45 Series




SONY 700TVL Solution
Effio-E + 673 CCD With OSD

Features

- ◆ 4.5 inch Plastic IR Dome Camera
- ◆ SONY / SHARP Color CCD
- ◆ 22 pcs $\varnothing$ 5mm IR-LED, IR Range 20M
- ◆ 3-Axis bracket inside, Easy For Installation
- ◆ Built-in 4--9mm Manual Zoom Lens



Size Chart

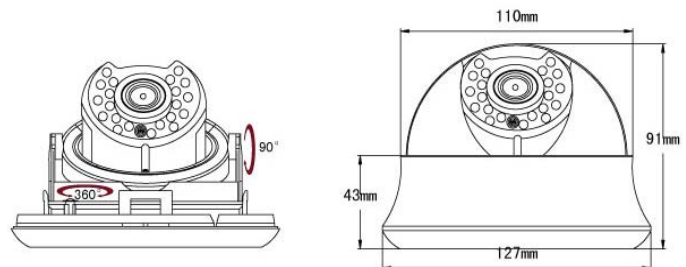

Specifications

Model Name	VS-DI45-70 VS-	DI45-38 VS-	DI45-36 VS-	DI45-32 VS-	DI45-31
Image Device	1/3 SONY	1/3 SONY	1/3 SHARP	1/3 SONY	1/3 SHARP
Resolution	700 TVL <i>(Effio-E)</i>	540 TVL	500 TVL	420 TVL	420 TVL
Picture Elements	PAL:976(H)×494(V) NTSC:976(H)×582(V)	PAL:795(H)×596(V) NTSC:811(H)×508(V)	PAL:752(H)×582(V) NTSC:768(H)×494(V)	PAL:500(H)×582(V); NTSC:510(H)×492(V)	
Min. Illumination	0.01 Lux /F2.0	0.2 Lux /F2.0	0.8 Lux /F2.0	1.0 Lux /F2.0	
TV System	PAL/NTSC				
Lens Furnished	4--9 mm Manual Zoom Lens (Optional 2.8--12mm Manual Zoom Lens)				
Infrared Luminary	22 pieces $\varnothing$ 5 mm IR-LED				
Illuminate Distance	20 M				
Wavelength	850 nm				
S/N Ratio	More than 48dB				
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000				
Gamma	0.45				
White Balance	Auto				
Gain Control	Auto				
Sync. System	Internal				
Video Output	1 Vp-p / 75 Ohms				
Power Supply	DC12V±10%				
Operation Temperature	-10℃ ~ +50℃ RH95% Max				
Dimension	ϕ127 x 91 mm				
Weight	600g				

Design and specifications are subject to change without notice.